

## J2 TECHNICAL ARTICLE

Number 187

March 12, 1984

From Octagon Heaven


Resource: Larry E. Lee

### BRAKE ADJUSTMENT PLATE LOCATION AND ADJUSTMENT DOOR


I was most happy to find someone who had some idea of the original location for the footbrake adjustment plate and the adjustment door that allowed adjustment. Mr. Lee made some very detailed drawings for us. He made these off of the originals!

I have some more detail questions to ask of Mr. Lee but they will be written later.

drivers side  $\frac{3}{8}$ " floorboard  
see tech article # \_\_\_\_\_  
for detail of floorboards

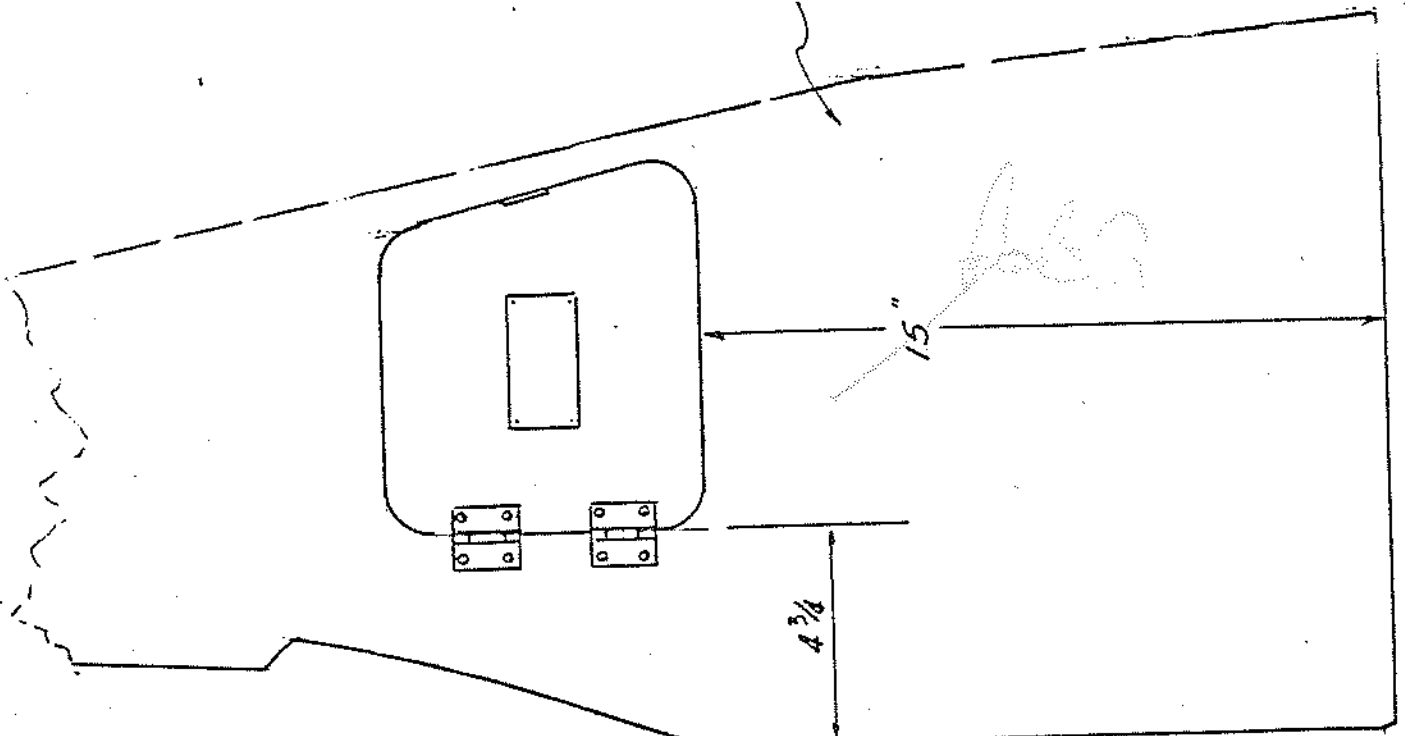

(CONTINUED BACK SIDE)

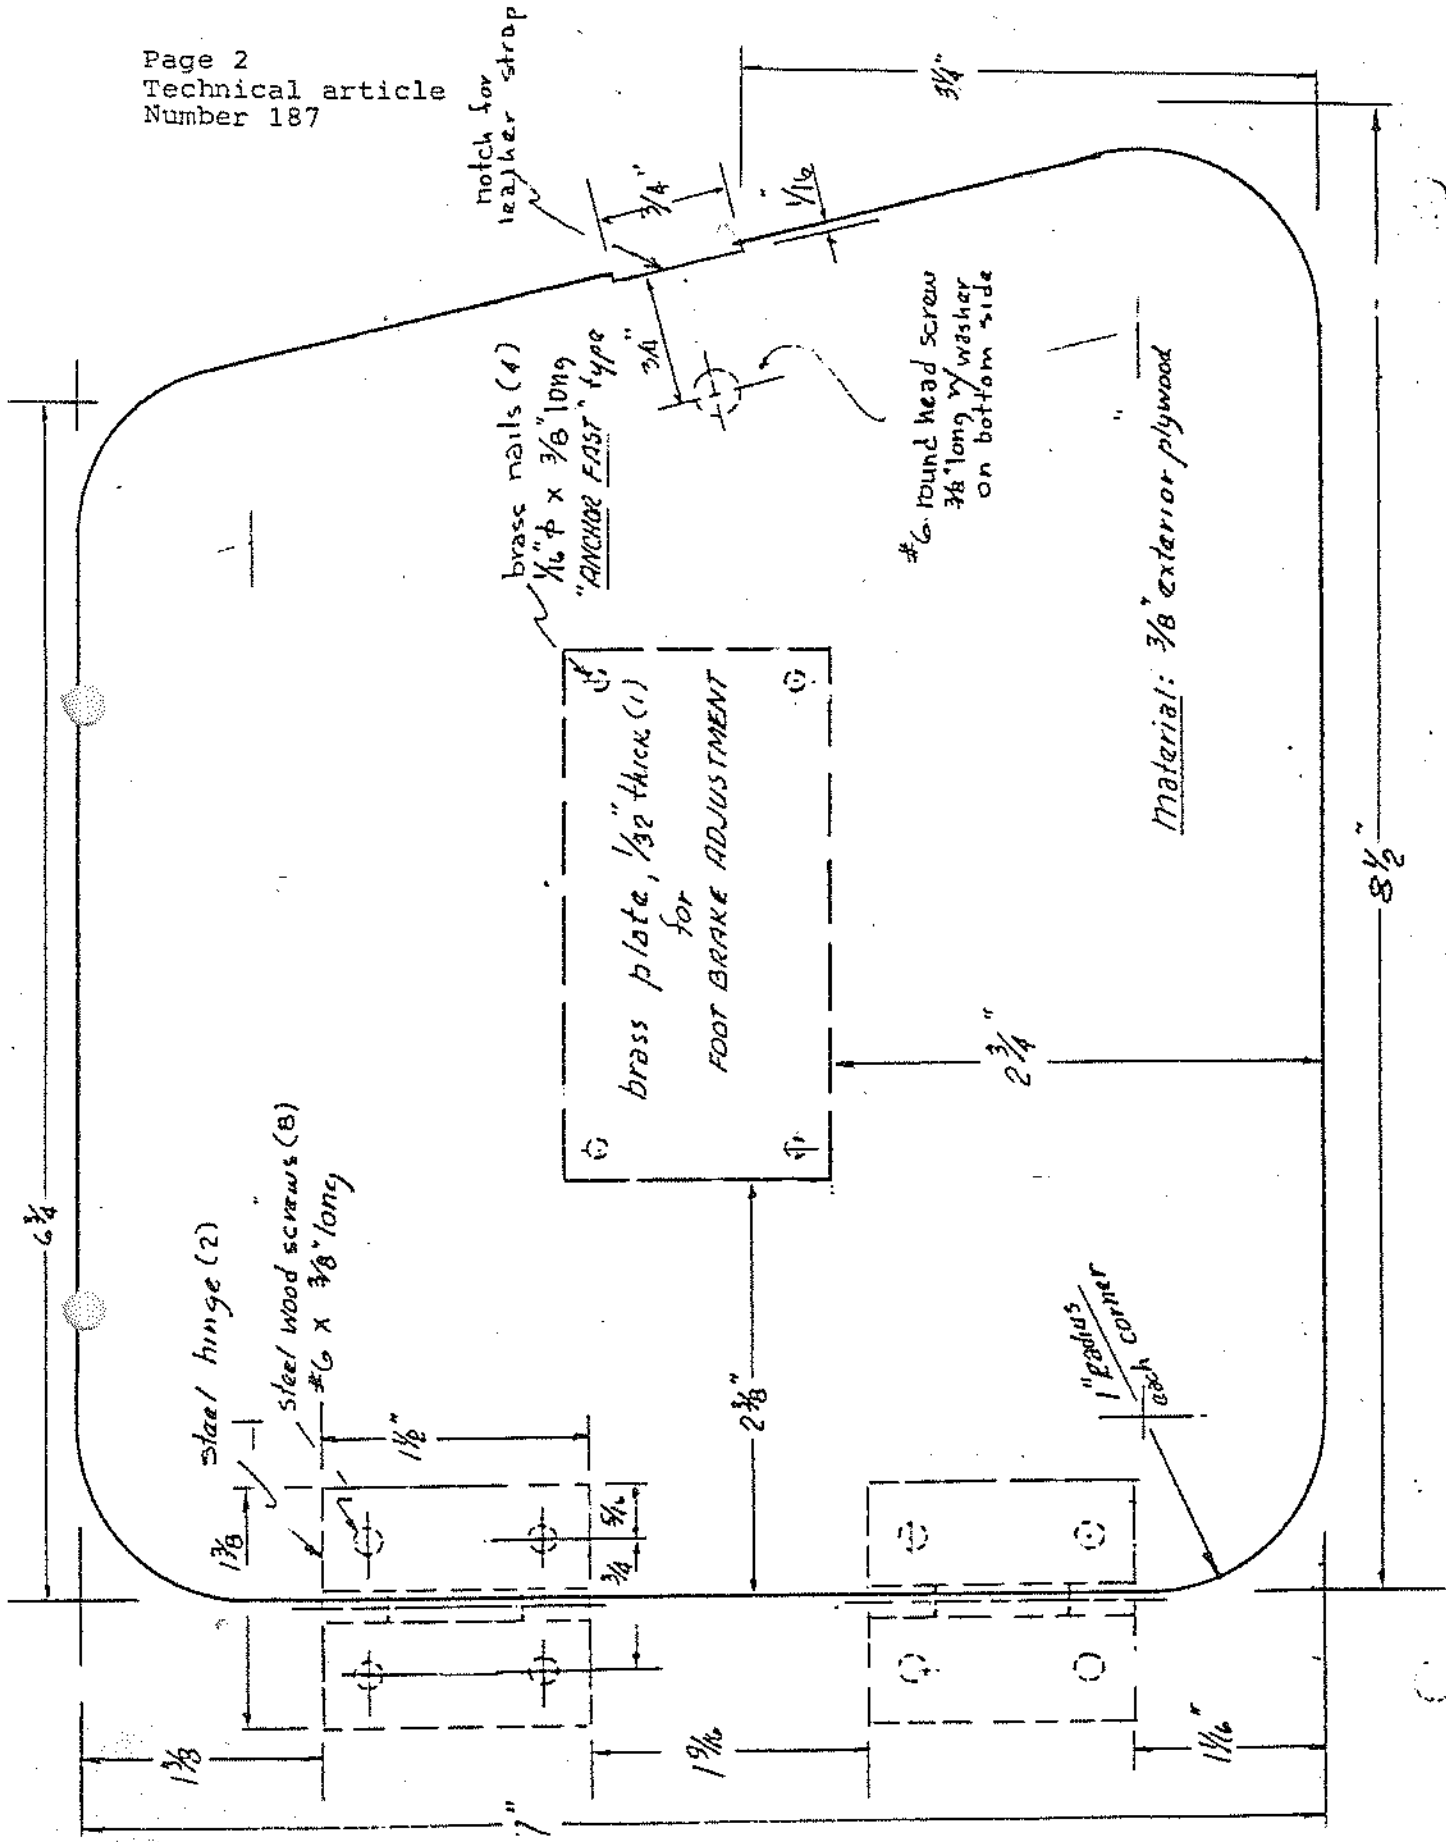

notch for leather strap

brass nails (4)  
1/16"  $\phi$  x 3/8" long  
"ANCHOR FAST" type

#6 round head screw  
3/8" long w/ washer  
on bottom side

Material: 3/8" exterior plywood

brass plate, 1/32" thick (1)  
for  
FOOT BRAKE ADJUSTMENT

steel hinge (2)

steel wood screws (8)  
#6 x 3/8" long

1" radius  
each corner

1 7/8"

1 7/8"

1 1/2"

5/16"

3/4"

2 3/8"

1 9/16"

1 1/16"

3 1/4"

2 3/4"

8 1/2"